


## UNDER HOIST OIL DRAINS



### Features: Models 8G-Drain and 18G-Drain

- ◆ Spout for evacuation
- ◆ Hand grips top and bottom for ease in evacuation
- ◆ Four 3.5" ball bearing wheels
- ◆ Height adjusts from 48 -71"
- ◆ Translucent polyethylene body allows easy viewing of fluid level
- ◆ 18" funnel with non-corrosive telescoping tube
- ◆ 3/4" evacuation valve (18 gallon model only)

## STANDS

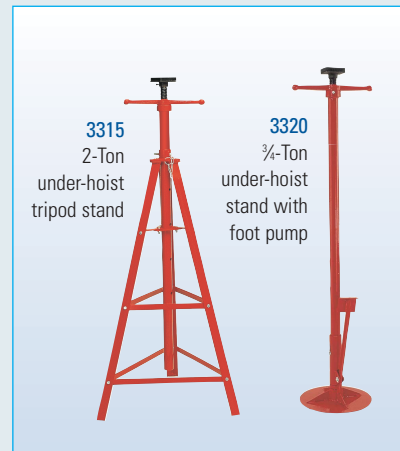

### 18G-SE-DRAIN Self-extracting oil drain



### Features: Self-Extracting 18G Oil Drain

- ◆ 14" diameter funnel
- ◆ 8' evacuation hose
- ◆ 18 gallon capacity
- ◆ Pressure gauge included
- ◆ 30" adjustable non-corrosive extension tube
- ◆ Steel holding tank

## TRANSMISSION JACKS



### Features: Model 3190-TJ

- ◆ Two-stage telescopic ram
- ◆ Universal head allows 42° forward tilt, 46° back tilt and 12° side tilt
- ◆ Fully adjustable universal saddle with spring loaded corner brackets allows easy tool-free adjustment
- ◆ Foot operated pump allows use of both hands to position and align saddle with transmission

### Features: Model 2158-TJ

- ◆ For use with in-ground and above-ground lifts
- ◆ Single-stage telescopic ram
- ◆ Wide base for stability
- ◆ Foot operated pump allows use of both hands to position and align saddle with transmission

SPECIFICATIONS	2158-TJ	3190-TJ
Capacity	1,100 lbs.	1,100 lbs.
Low height	45"	33.5"
High height	71"	72.5"
Shipping weight	97 lbs.	219 lbs.